

① REMOVE THESE EDGES FIRST
FOLD, CREASE AND TEAR ALONG PERFORATION

RETURN ENVELOPE ENCLOSED



② To Open This Side - Slide Finger Under This Edge

① REMOVE THESE EDGES FIRST
FOLD, CREASE AND TEAR ALONG PERFORATION

MOISTEN AND FOLD TO SEAL
REWETTTABLE GLUE

8510013497/1146021 ©2006, Pressure Seal Patents 4,918,128;
5,513,795; 5,829,670, 6,015,085 and other pats. - 0221

REMOVE THIS STUB BEFORE
SEALING RETURN ENVELOPE

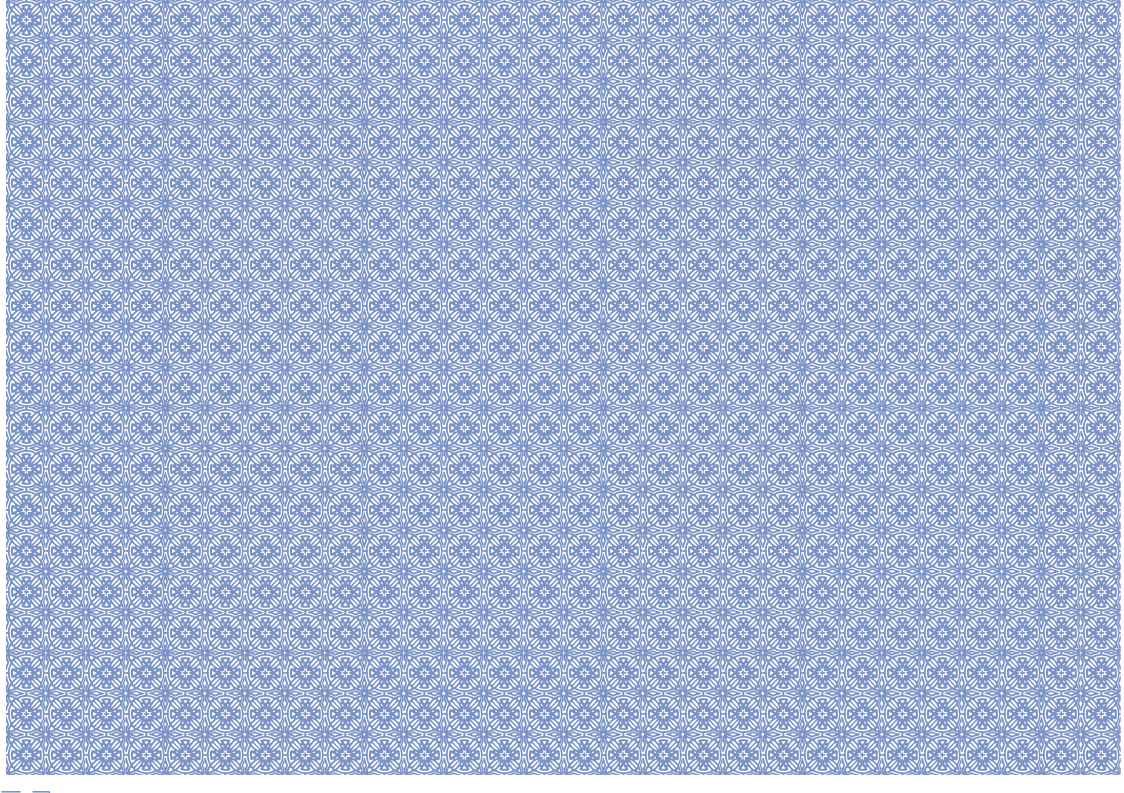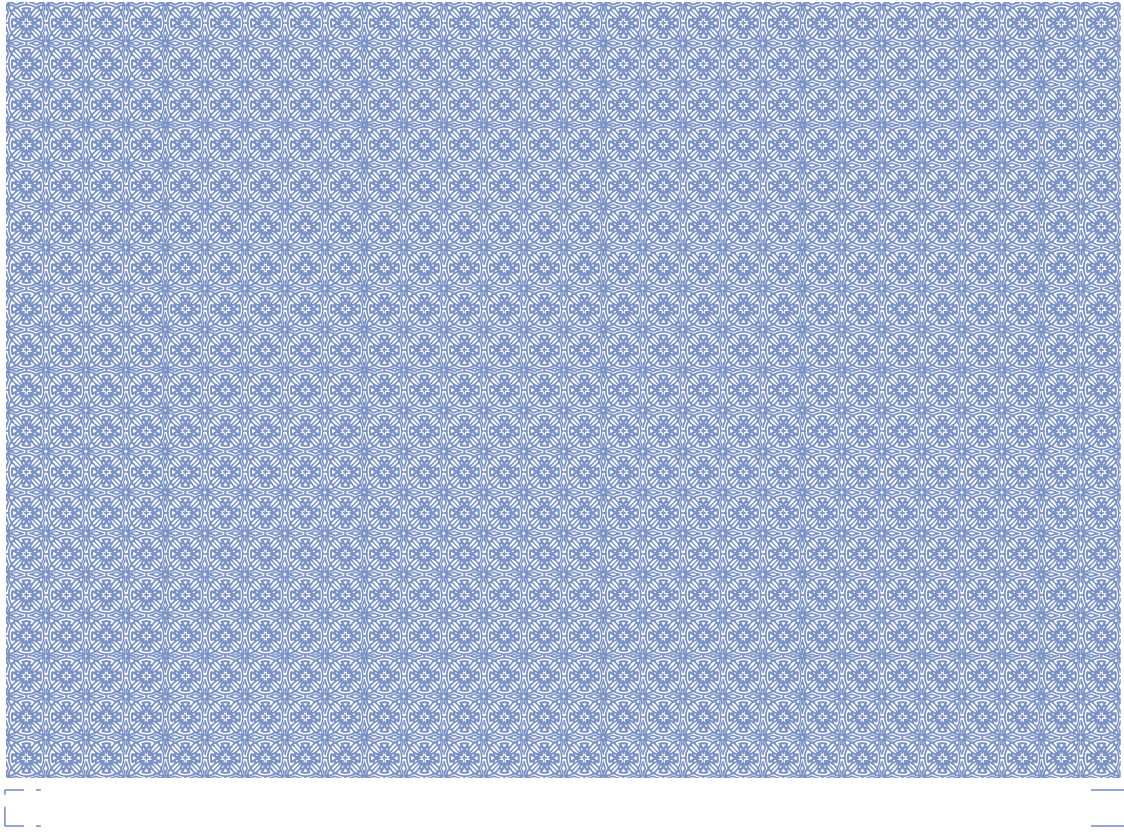

TURN ENVELOPE OVER
FOR OPENING INSTRUCTIONS

0.0

RE14Z

↑ DETACH HERE ↑

TURN ENVELOPE OVER
FOR OPENING INSTRUCTIONS

B1A

0.0